

## 1.25Gb/s SFP DWDM 160km Transceiver HXSD-1LxxY1x

### Features

- Up to 1.25Gb/s data links
- DWDM DML laser transmitter and APD photo-detector
- 100 GHz ITU channel spacing with integrated wavelength locker
- Up to 160km on 9/125um SMF
- Hot-pluggable SFP footprint
- Duplex LC/UPC type pluggable optical interface
- Low power dissipation
- RoHS-10 compliant and lead-free
- Support Digital Monitoring interface
- Single +3.3V power supply
- Compliant with SFF-8472
- Metal enclosure, for lower EMI
- Meet ESD requirements, resist 8KV direct contact voltage
- Case operating temperature  
Commercial: 0 ~ +70°C  
Extended: -10 ~ +80°C  
Industrial: -40 ~ +85°C



### Applications

- SONET/SDH networks
- Gigabit Ethernet
- C Band DWDM networks
- Fiber Channel
- Other Optical Links

### Part Number Ordering Information

Part Number	Data Rate (Gb/s)	Wavelength (nm)	Transmission Distance(km)	Temperature (°C) (Operating Case)
HXSD-1LxxY1C	1.25	Refer to wavelength selection	160	0~70 commercial
HXSD-1LxxY1E	1.25		160	-10~80 Extended
HXSD-1LxxY1I	1.25		160	-40~85 Industrial

## Wavelength Selection: C-band $\lambda_c$ Wavelength Guide Pin Descriptions

Channel (xx)	Wavelength (nm)	Frequency (THZ)	Channel (xx)	Wavelength (nm)	Frequency (THZ)
17	1563.86	191.70	39	1546.12	193.90
18	1563.05	191.80	40	1545.32	194.00
19	1562.23	191.90	41	1544.53	194.10
20	1561.42	192.00	42	1543.73	194.20
21	1560.61	192.10	43	1542.94	194.30
22	1559.79	192.20	44	1542.14	194.40
23	1558.98	192.30	45	1541.35	194.50
24	1558.17	192.40	46	1540.56	194.60
25	1557.36	192.50	47	1539.77	194.70
26	1556.55	192.60	48	1538.98	194.80
27	1555.75	192.70	49	1538.19	194.90
28	1554.94	192.80	50	1537.40	195.00
29	1554.13	192.90	51	1536.61	195.10
30	1553.33	193.00	52	1535.82	195.20
31	1552.52	193.10	53	1535.04	195.30
32	1551.72	193.20	54	1534.25	195.40
33	1550.92	193.30	55	1533.47	195.50
34	1550.12	193.40	56	1532.68	195.60
35	1549.32	193.50	57	1531.90	195.70
36	1548.51	193.60	58	1531.12	195.80
37	1547.72	193.70	59	1530.33	195.90
38	1546.92	193.80	60	1529.55	196.00
<b>Non-ITU</b>	Peak wavelength between 1528.77nm-1563.86		61	1528.77	196.10

## I. Absolute Maximum Ratings

It has to be noted that the operation in excess of any individual absolute maximum ratings might cause permanent damage to this module.

Parameter	Symbol	Min	Max	Unit	Notes
Storage Temperature	T <sub>S</sub>	-40	85	°C	
Power Supply Voltage	V <sub>CC</sub>	-0.5	3.6	V	
Relative Humidity (non-condensation)	RH	5	95	%	
Damage Threshold	TH <sub>d</sub>	0		dBm	

## II. Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Case Temperature	T <sub>OP</sub>	0		70	°C	commercial
		-10		80		extended
		-40		85		Industrial
Power Supply Voltage	V <sub>CC</sub>	3.135	3.3	3.465	V	
Data Rate			1.25		Gb/s	
Control Input Voltage High		2		V <sub>CC</sub>	V	
Control Input Voltage Low		0		0.8	V	
Link Distance (SMF)	D			160	km	9/125um

## III. General Description

Walsun HXSD-1LxxY1x transceivers include an APD photo-detector diode and temperature stabilized DWDM DML transmitter. Digital diagnostic functions are available via an I2C. This module is designed for single mode fiber and operates at a nominal wavelength of 100GHz ITU Grid, C Band DWDM wavelength. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The optical output can be disabled by a TTL logic high-level input of Tx Disable, and the system also can disable the module via I2C. Tx Fault is provided to indicate that degradation of the laser.

Loss of signal (LOS) output is provided to indicate the loss of an input optical signal of receiver or the link status with partner. The system can also get the LOS (or Link)/Disable/Fault information via I2C register access.

## IV. Pin Assignment and Pin Description

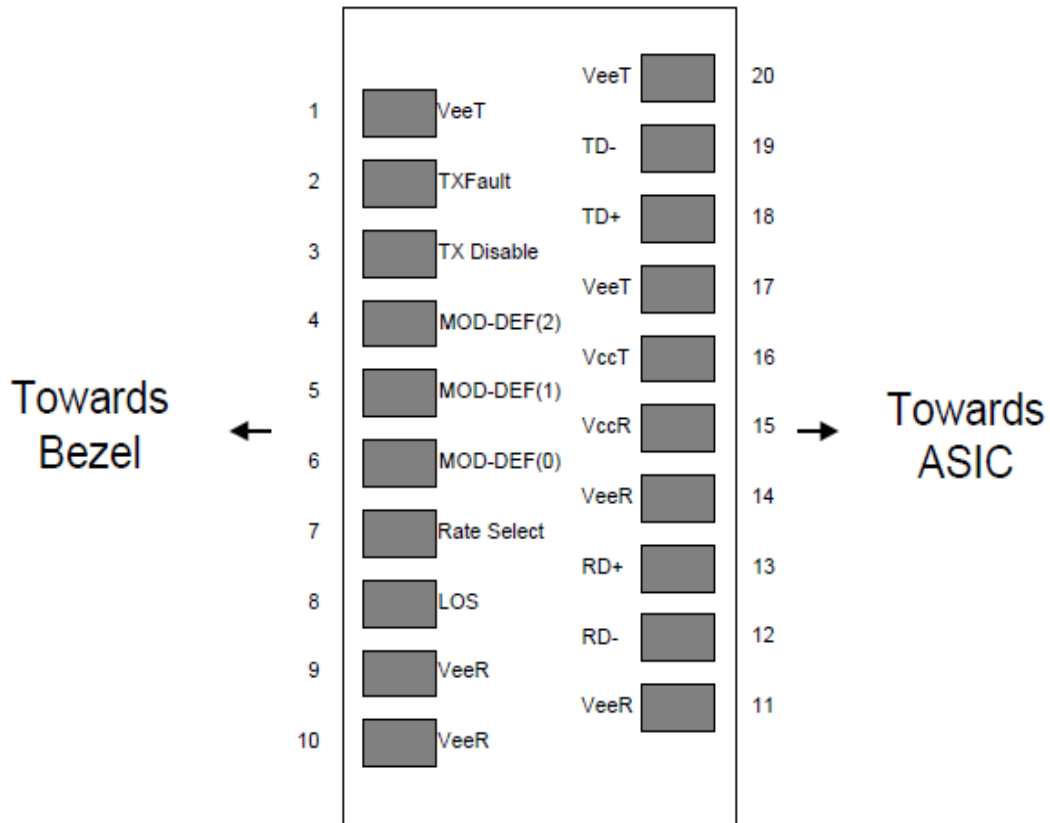


Figure1. Diagram of host board connector block pin numbers and names

Pin	Symbol	Name/Description	Notes
1	VEET	Transmitter Ground (Common with Receiver Ground)	1
2	TXFAULT	Transmitter Fault.	
3	TXDIS	Transmitter Disable. Laser output disabled on high or open.	2
4	MOD_DEF (2)	Module Definition 2. Data line for Serial ID.	3
5	MOD_DEF (1)	Module Definition 1. Clock line for Serial ID.	3
6	MOD_DEF (0)	Module Definition 0. Grounded within the module.	3
7	Rate Select	No connection required	4

8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	5
9	VEER	Receiver Ground (Common with Transmitter Ground)	1
10	VEER	Receiver Ground (Common with Transmitter Ground)	1
11	VEER	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VEER	Receiver Ground (Common with Transmitter Ground)	1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k-10k ohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF (0) pulls line low to indicate module is plugged in.
4. This is an optional input used to control the receiver bandwidth for compatibility with multiple data rates (most likely Fiber Channel 1x and 2x Rates). If implemented, the input will be internally pulled down with > 30kΩ resistor. The input states are:
  - 1) Low (0 – 0.8V): Reduced Bandwidth
  - 2) (>0.8, < 2.0V): Undefined
  - 3) High (2.0 – 3.465V): Full Bandwidth
  - 4) Open: Reduced Bandwidth
5. LOS is open collector output should be pulled up with 4.7k-10k ohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## V. Electrical Characteristics

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Parameter	Symbol	Min.	Typical	Max	Unit	Notes
Power Consumption	P			1.0	W	commercial

				1.5		Industrial
Supply Current	I <sub>cc</sub>			300	mA	commercial
				450		Industrial
<b>Transmitter</b>						
Single-ended Input Voltage Tolerance	V <sub>CC</sub>	-0.3		4.0	V	
Differential Input Voltage Swing	V <sub>in,pp</sub>	200		2400	mV pp	
Differential Input Impedance	Z <sub>in</sub>	90	100	110	Oh m	
Transmit Disable Assert Time				5	us	
Transmit Disable Voltage	V <sub>dis</sub>	V <sub>CC</sub> -1.3		V <sub>CC</sub>	V	
Transmit Enable Voltage	V <sub>en</sub>	V <sub>EE</sub> -0.3		0.8	V	
<b>Receiver</b>						
Differential Output Voltage Swing	V <sub>out,pp</sub>	500		900	mV pp	
Differential Output Impedance	Z <sub>out</sub>	90	100	110	Oh m	
Data output rise/fall time	T <sub>r</sub> /T <sub>f</sub>		100		ps	20% to 80%
LOS Assert Voltage	V <sub>losH</sub>	V <sub>CC</sub> -1.3		V <sub>CC</sub>	V	
LOS De-assert Voltage	V <sub>losL</sub>	V <sub>EE</sub> -0.3		0.8	V	

## VI. Optical Characteristics

The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Parameter	Symbol	Min.	Typical	Max	Unit	Notes
<b>Transmitter</b>						
Center Wavelength	$\lambda_c$	$\lambda_c - 0.1$		$\lambda_c + 0.1$	nm	1
Center Wavelength Spacing			100		GHz	
Spectrum Bandwidth (RMS)	$\sigma$			1	nm	

Side Mode Suppression Ratio	SMSR	30			dB	
Average Optical Power	P <sub>AVG</sub>	1		6	dBm	2
Extinction Ratio	ER	9			dB	
Transmitter OFF Output Power	P <sub>off</sub>			-45	dBm	
Transmitter Eye Mask	Compliant with 802.3z(class 1 laser safety)					
<b>Receiver</b>						
Center Wavelength	$\lambda_c$	1270		1610	nm	
Sensitivity (Average Power)	Sen.			-33	dBm	3
Input Saturation Power(overload)	P <sub>sat</sub>	-10			dBm	
LOS Assert	LOSA	-41			dBm	4
LOS De-assert	LOSD			-34	dBm	4
LOS Hysteresis	LOSH	0.5			dB	

Notes:

1.  $\lambda_c$  refer to wavelength selection, and corresponds to approximately 0.8 nm.
2. Measure at 2<sup>7</sup>-1 NRZ PRBS pattern.
3. Measured with Light source 1563.86~1528.77nm, ER=9dB; BER≤1E-12 @PRBS=2<sup>7</sup>-1 NRZ.
4. When LOS de-asserted, the RX data+/- output is High-level (fixed).

## VII. Digital Diagnostic Functions

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF-8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales staff.

Parameter	Symbol	Min.	Max	Unit	Notes
Temperature monitor absolute error	DMI_Temp	-3	3	°C	Over operating temp
Supply voltage monitor absolute error	DMI_VCC	-0.15	0.15	V	Full operating range
RX power monitor absolute error	DMI_RX	-3	3	dB	
Bias current monitor	DMI_bias	-10%	10%	mA	
TX power monitor absolute error	DMI_TX	-3	3	dB	

## VIII. Mechanical Dimensions

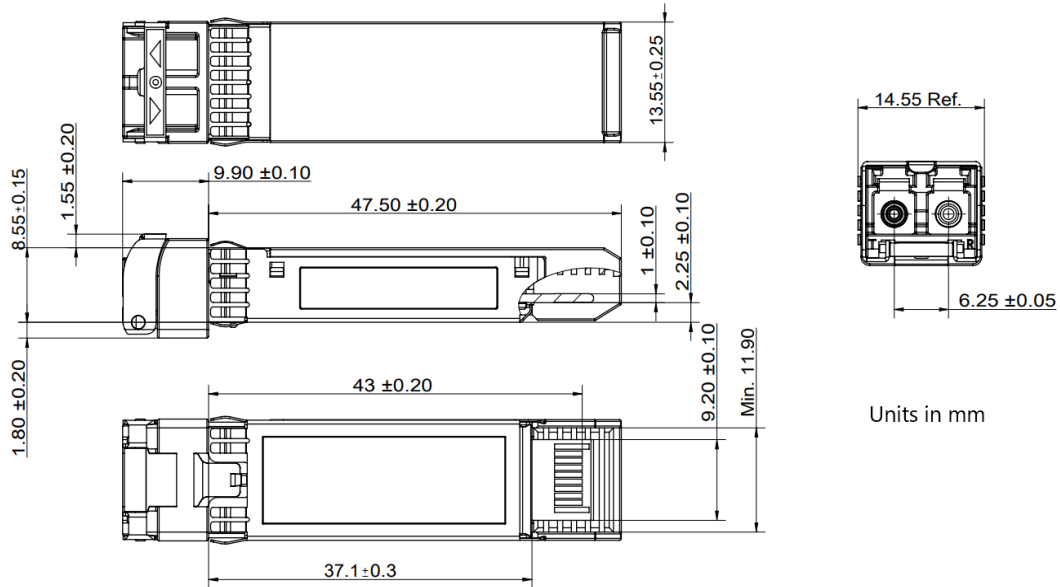


Figure2. Mechanical Outline

## IX. Revision History

Version No.	Initiated	Revised contents	Release Date
1.0	Andy Zhang	Preliminary datasheet	2014-06-11
1.1	Andy Zhang	Mechanical Change	2016-04-08

## X. Contact us

### Walsun Technology Co., Ltd

2-5# Tongfuyu Industrial Zone, Aiqun Road, Shiyuan Street, Baoan District, Shenzhen, China

T. +86 0755-23007456

F. +86 0755-23007451

PC. 518108

E. sales@walsun.com

H. www.walsun.com